



ARCTICA HAV

C6UL8 - IMO 8403571
 General Dry Cargo ship built 1984
 Bahamas Flag; P&I by Gard; DNV-
 GL+100A5

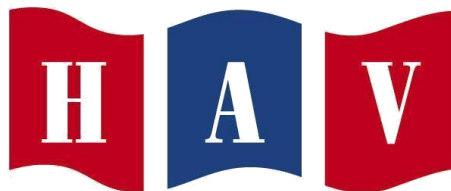

Mobile captain: +47 99308997
 Satellite phone: +870 773 157 120
 E-Mail 1: arctica@hav.amosconnect.com

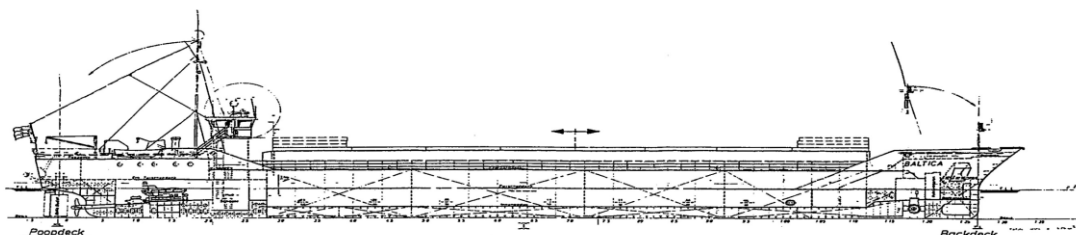

SHIP DETAILS

- all details about and without guarantee -

GT	1 532	Timbercapacity-LP	Abt 2900 cum LP
NT	853		
LOA	82,45	Slings	Upon request
Beam	11,3	Air bags	Upon request
Draft summer	4,21	Lashing belts	Upon request
DWT	2 324		
DWCC-Summer	2 150	BULKHEAD	Frame No.
DWCC - Winter	2 080	Pos 1	69
Capacity of holds bale (cbm)	2 909	Pos 2	91,5
Capacity of holds bale (cbft)	102 721	Pos 3	98
Capacity of holds grain (cbm)	2 914	Pos 4	103,5
Capacity of holds grain (cbft)	102 893	Pos 5	112
			Cuft from aft
			49 065
			76 117
			83 983
			90 671
			101 190

Rudder type	Becker	Min airdraft in heavy ballast (FW)/top of hatches	6,51
Bow thruster	132 kw	Max airdraft in heavy ballast	17,5
Dept moulded	5,4	Rhine/Seine/Saimaa fitted	NO
Service speed (knots)	Abt 9 kn	Fesi fitted	No
Consumption main engine (ltr/24hrs) with A/E	3500ltr	Ventilation - airchanges/hours	6
Port consumption (tons/24hrs)	0,3	Hatch type	Piggy back multi stack
Main engine type / output	Deutz/700kW	Hatch dimension /hatches closed/, (m)	49,8 x 9,0
Propeller	Fixed		
Max permissible loading on hatch covers (t/m2)	1,5	Hold dimenions L x B x H (m) Last 4,8m in forepart narrowing down to beam 7,8m (height 1,9m)	50,4 x 9,0 x 6,3m
Max permissible loading on tanktop . ((t/m2) Tanktop strengthened for heavy cargo.	11	Height of hatchcover motors into the hold	20 cm
Distance from waterline fully ballasted top of hatch coaming /hatches closed/, (m)	5,29	Container capacity (TEU)	0
Height of hatch coaming /hatches closed/, (m)	2,48	Tank capacities:	
Distance from keel to top with antenna (m)	20,1	Water ballast	996 c.m.
Distance from tank top to top of hatch coamings (m)	6,3	Gasoil	121,8 c.m.
Mean draft of ship in heavy ballast (m) (FW)	2,6	Freshwater	58,8 c.m.