



DANICA HAV

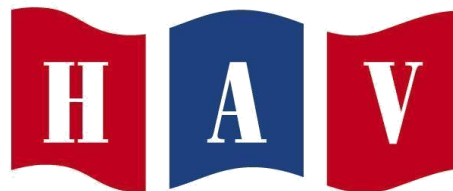

C6ML9 - IMO 8401535
 General Dry Cargo ship built 1984
 Bahamas Flag; P&I by Gard;
 DNV-GL+100A5

Mobile captain: +4795177322
 Satellite Phone: +870 773156787
 E-Mail: danica.hav@amosconnect.com

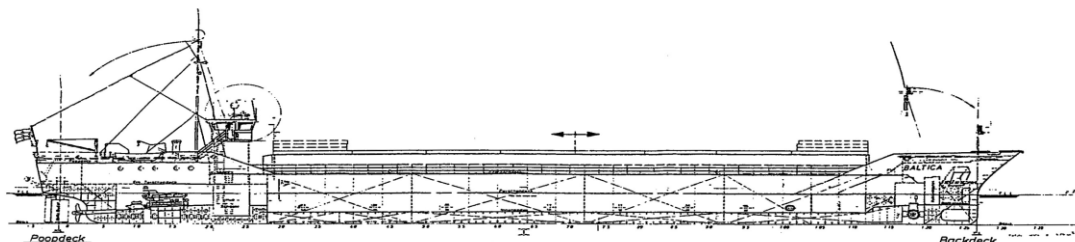

SHIP DETAILS

- all details about and without guarantee -

GT	1536	Timbercapacity-LP	2700 cub
NT	774	Lifting slings	Upon request
LOA	82,45	Lashing belts	Upon request
Beam	11,3	Air bags	Upon request
Draft summer	4,2	Tarpulins	Upon request
DWT	Abt 2310		
DWCC-Summer	Abt 2150	BULKHEAD	Frame No.
DWCC - Winter	Abt 2080	Pos 1	69
Capacity of holds bale (cbm)	2 865	Pos 2	91,5
Capacity of holds bale (cbft)	101196	Pos 3	98
Capacity of holds grain (cbm)	2 865	Pos 4	103,5
Capacity of holds grain (cbft)	101196	Pos 5	112
			Cuft from aft
			44394
			76117
			83983
			90671
			101180

Rudder type	Becker	Min airdraft in heavy ballast (FW)/top of hatches	6,51
Bow thruster	132 kw	Max airdraft in heavy ballast	17,5
Dept moulded	5,4	Rhine/Seine/Saimaa fitted	yes
Service speed (knots)	Abt 9	Fesi fitted	no
Consumption main engine (tons/24hrs) with A/E	3500 ltr.	Ventilation - airchanges/hours	6
Port consumption (tons/24hrs)	300 ltrs	Hatch type	Piggy back multi stack
Main engine type / output	Deutz/700 kW	Hatch dimension /hatches closed/, (m)	50,0 x 9,3
Propeller	Fixed		
Max permissible loading on hatch covers (t/m2)	1,5	Hold dimensions L x B x H (m) Last 5,09m in forepart narrowing down to beam 7,35m	50,4x9,0x6,3
Max permissible loading on tanktop ((t/m2) Tanktop strengthened for heavy cargo.	11	Height of hatchcover motors into the hold	10 cm
Distance from waterline fully ballasted top of hatch coaming /hatches closed/, (m)	5,29	Container capacity (TEU)	0
Height of hatch coaming /hatches closed/, (m)	2,48	Tank capacities:	
Distance from keel to top with antenna (m)	20,1	Water ballast	967,6 c.m.
Distance from tank top to top of hatch coamings (m)	6,3	Gasoil	111,6 c.m.
Mean draft of ship in heavy ballast (m) (FW)	2,6	Freshwater	59,4

